

DL150 LED

Deckenaufbauleuchte IP65
Surface mounted luminaire IP65


HOFFMEISTER



06-2011


HOFFMEISTER LEUCHTEN GmbH
Gewerbering 28-32
D 58579 Schalksmühle
Tel.: +49 23 55 - 50 41-0
Fax: +49 23 55 - 50 41-328
www.hoffmeister.de
mail@hoffmeister.de

**Deckenaufbauleuchte IP65**


- mit LED-Modul 18/19W, 1100 lm
- sichtbarer Leuchtenabschluss aus Sicherheitsglas, klar 8 mm
- Farbwiedergabeindex CRI 80
- mittlere Lebensdauer 50.000 h
- mit LED-Netzgerät (220-240V 50/60Hz)
- Gehäuse aus Aluminium-Druckguss
- Deckenbefestigung aus Aluminium-Druckguss
- Reflektor aus Reinstaluminium 99,9%, hochglänzend eloxiert
- IP65, Schutzklasse I
- Farbe: silber, weiß, anthrazit, nightblue

Surface mounted downlight IP65

- with LED module 18W/19W, 1100 lm
- outer luminaire cover of clear 8 mm safety glass
- colour rendering index CRI 80
- average life cycle 50.000 h
- with LED power unit (220-240V 50/60Hz)
- housing of die-cast aluminium
- ceiling attachment of die-cast aluminium
- reflector of highest grade aluminium 99.9%, mirror finish anodized
- IP65, protection class I
- colour: silver, white, anthracite, nightblue


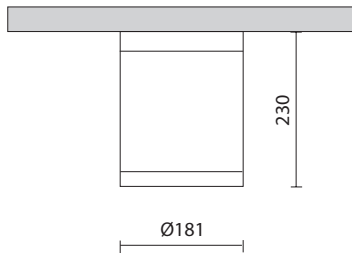


Typ Type	Lichtfarbe Colour-Temp.	Systemleistung Total load	KG	Art.-Nr. silber Item No. silver	Art.-Nr. weiß Item No. white	Art.-Nr. anthrazit Item No. anthracite
LED 1100 lm	3000 K	19W	3,9	102 342	102 344	102 346
LED 1100 lm	4000 K	18W	3,9	102 343	102 345	102 347



LED 18/19W		$\le 52^\circ$	
η_{LOR}	= 82%		
UGR	= 11.1		
		55° < 1000 cd/m ²	
E[lx]	100lx	500lx	
a[m ²]	n=14	n=66	
		7102	

LED 18/19W		$\le 52^\circ$	
h	C0	Em	
[m]	Ø[m]	[lx]	
1.0	0.97	788	
2.0	1.94	197	
3.0	2.91	88	
4.0	3.88	49	
5.0	4.86	32	
		7102	

**Zubehör / Accessories**

Ring für variablen Halbeinbau
Ring for variable semi-recessing

weiß / white

Art.-Nr. / Item No.

0.79040.00-910

nightblue / nightblue

0.79040.00-566

anthrazit / anthracite

0.79040.00-726

silber / silver

0.79040.00-916